



1. With the door in the closed position , place the wooden marker block (supplied) 1 ¼ inch wide vertically against the frame.


With a pencil held at the side of the block on the frame side,slide the block from the top of the door to the bottom,ensuring that the pencil moves in conjunction with the block leaving a pencil mark guideline down the frame.





2. With the door still in the closed position, place the wooden marker block vertically against the door and repeat the same process of step 1, thereby leaving a pencil guideline on both the door and the frame.



3. Now wedge the door in the fully open position. (For metal doors and kick-plates pre-drill with 2.5mm drill bit.)

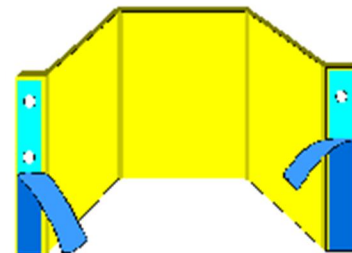

4. Remove one layer only of the double sided tape from each side of the Fingerkeeper device.

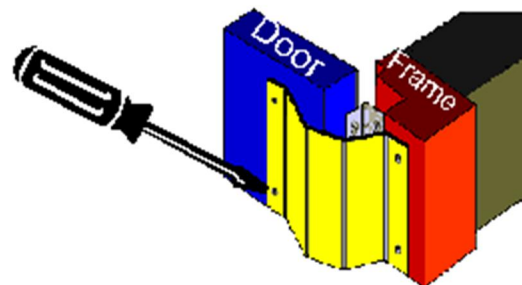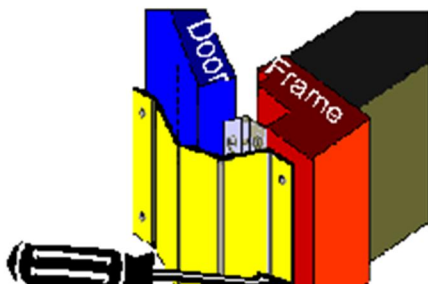

5. Line up the edge of the Fingerkeeper parallel to the guideline/pencil line on the frame. Press firmly to hold in position before finally securing with the screws (provided) ensuring that there is a screw in every hole of the device.

6. Repeat this procedure to attach the Fingerkeeper device to the door itself.

Please ensure you use the screws provided or an exact size and type of screw (3/8"no 4 size flange-head self [tapping screws](#) type C)

Once fitted the device should be in position as shown in the animation below.



Maintenance

Clean with a damp cloth. Keep a maintenance record for the product.

Constant kicking or striking of the device could cause the device to rip, tear or be dislodged from its fixing - check regularly.