

Finger Keeper Front Installation Sheet

Tools & Equipments

- Measuring Block.
- Carpenters Pencil.
- Hacksaw.
- Screwdriver.

Introduction

Finger Keeper Front is a finger guard that prevents door finger trapping accidents. By totally covering the gap that is created on the hinge side of a door, in the open position, it prevents finger trapping injuries. Finger Keeper Front can be fitted to most types of doors including wood, metal and uPVC.


Suitable for: Standard timber or steel framed doors minimum 1,37" door thickness Butt hinged doors. Conventional pedestrian door sizes opening angles up to 160°.

Please read this instruction carefully before installing and using the device. The protective function and any possible guarantee of the device might be affected if you do not follow the instructions. Pass the instructions to the end user for future reference.

Warning - Replace the device if any part is broken, torn or missing.

Finger Keeper Front Installation Sheet

Installation

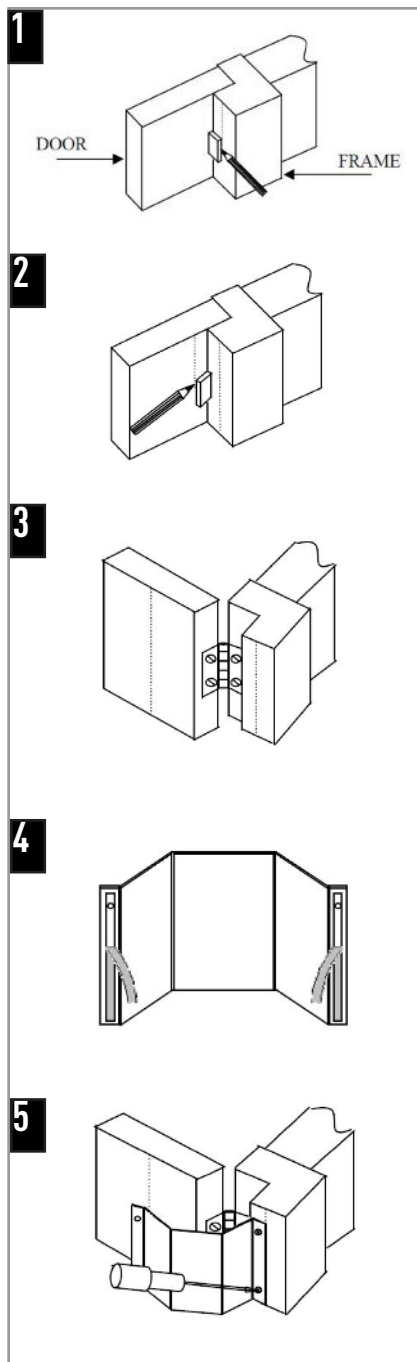

1. With the door in the closed position, use a pencil/pen to draw a guideline on the door frame using 0,8" plastic measuring block (provided).


2. Simply repeat the procedure on the door to produce a second guideline.

3. Now wedge the door in the fully open position.

4. Remove one layer only of the double sided tape from each side of the Finger Keeper Front.

5. Line up the edge of the Finger Keeper Front parallel to the guideline/pencil line on the frame. Press firmly to hold in position before finally securing with the screws (provided). (For metal doors and kick-plates pre-drill with 0,1" drill bit).

6. Repeat this procedure to attach the Finger Keeper Front to the door itself. Mount 5mm from floor.

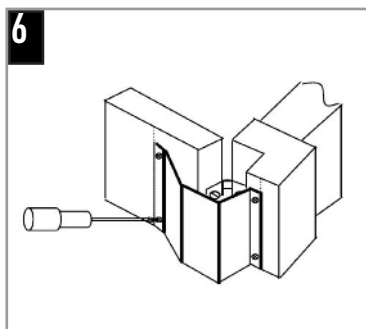

Storage & Disposal

Finger Keeper Front should be stored indoors. No shelf life is given as this product will not deteriorate in storage.